
S3210P PUSH-AROUND MINI SCISSOR LIFT



- Outdoor-rated
- Simple to use; easy to maintain
- No stabilizers required
- Durable design for tough site conditions
- Proven benefits over other low level access products

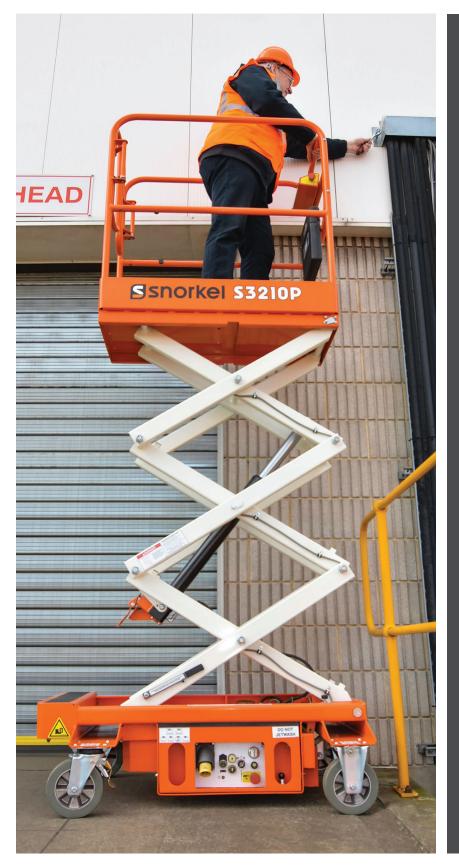

PUSH-AROUND MINI SCISSOR LIFT

DIMENSIONS	\$3210P*
Max. working height	15 ft 10 in
Max. platform height (A)	9 ft 10 in
Platform size (outside)	43 in x 20 in
Overall width (B)	2 ft 8 in
Overall length (C)	3 ft 11 in
Stowed height (D)	5 ft 10 in

PERFORMANCE	
Platform capacity (SWL)	529 lbs
Max. wind speed	28 mph
Raise/lower time	19/26 sec


POWER	
Power source	12V DC battery
Battery charger	Built in multi-voltage (90V - 240V)

WEIGHT

Weight


16ft 14ft 12ft

PLATFORM HEIGHT



ANSI Specification ©Snorkel 2020

S3210P



STANDARD FEATURES

- Outdoor-rated
- Auto brake system
- Tilt sensor

1,036 lbs

Δ

- Saloon-door style entry gates •
- Integrated battery charger 90V 240V •
- Battery charge indicator •
- Forklift pockets •
- Emergency lowering system
- Non-marking casters •
- Slide-out service trays •
- 2 year parts & labor, 5 year structural warranty •
- ANSI compliant

OPTIONS

- Special paint colors
- Environmental hydraulic oil •



P.O. Box 1160 St.Joseph, MO 64502-1160, USA Tel: 1 (785) 989-3000 Toll-free: 1 (800) 255-0317 Fax: 1 (785) 989-3070 Email: sales.usa@snorkellifts.com

www.snorkellifts. :.com

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance. * Preliminary specifications - confirm at time of ordering.